


A Nylon Protective Sleeves - MSHA Accepted



Application:	Woven nylon tubular sleeving. Ideal for use as a protective covering on hydraulic and industrial hose. Tight weave of the seamless tubular sleeving helps dispense the flow of fluid in a ruptured hose.
Colour:	Black
Temperature:	Withstands temperatures up to 135°C
Standards:	MSHA accepted, passes flammability tests

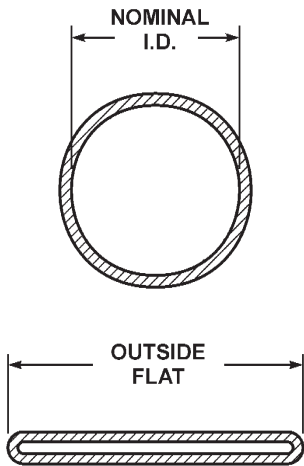

Part No.	Dimensions (mm)		Length (mtr)	Price \$ per coil
	Nominal ID	Outside Flat		
DHS90-100	23	38	30	197.86
DHS100-100	25	42	30	229.04
DHS106-100	27	48	30	154.58
DHS122-100	31	54	30	438.01
DHS138-100	35	57	30	292.63
DHS142-100	36	63	30	410.48
DHS159-100	39	67	30	346.35
DHS159-1-100	40	70	30	562.19
DHS175-100	44	73	30	401.00
DHS181-100	46	76	30	446.59
DHS219-100	56	92	30	555.86
DHS238-100	60	99	30	493.53
DHS263-100	67	108	30	603.20
DHS288-100	73	121	30	803.36
DHS366-100	93	149	30	741.15
DHS520-100FRAC	131	190	50	30.01

Price Group: PC
DC07

Complete hose data specification sheets are available upon request.