

BSP Fittings


Application:	Suitable for use in General Low pressure air and water applications.
Body Material:	Polypropylene
Pressure Rater Water:	PN10
Chemical Resistance:	Line 5 threaded fittings are produced from PP and designed to work with cold water.
Recommendation:	We recommend the use of PTFE tape in threaded connections.



5040 - BSP Tee

G1 (mm)	Part No.	H (mm)	I2 (mm)	Weight (g)	Price \$
1/2"	PTF-TEE-15	64	18	25	6.71
3/4"	PTF-TEE-20	68	19	39	7.49
1"	PTF-TEE-25	81	21	61	9.34
1 1/2"	PTF-TEE-40	108	25	157	18.41
2"	PTF-TEE-50	130	30	205	22.80

Price Group: SD
MS01

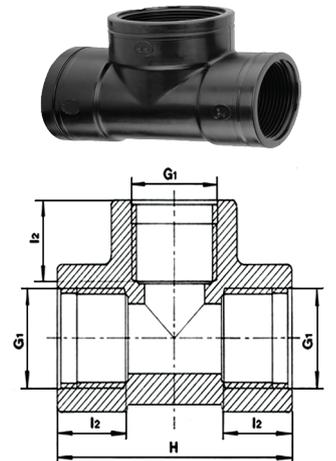

5050 - BSP Elbow

G1 (mm)	Part No.	H (mm)	I2 (mm)	Weight (g)	Price \$
1/2"	PTF-EFF-15	32	17	22	POR
3/4"	PTF-EFF-20	35	18	30	POR
1"	PTF-EFF-25	41	21	45	POR
1 1/4"	PTF-EFF-32	48	25	87	POR
1 1/2"	PTF-EFF-40	54	25	116	POR
2"	PTF-EFF-50	65	30	157	POR

Price Group: SD
MS01

