


Ball Nozzles for Bulk Delivery



With Spout

Automatic Shut-Off Nozzle

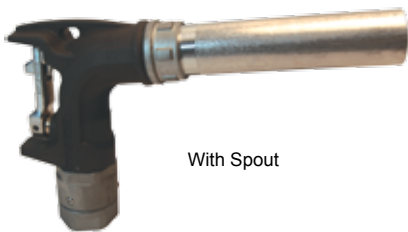

Application:	3psi check valve is included to prevent back flow, 5psi is optional.
Design:	Rugged construction for rapid fuel oil transfer/delivery. Heavy duty roller ball swivel with low temperature seals freely rotates without leaking.
Material:	Anodized Aluminium
Flow Rate:	High flow

Female Inlet Size (inch)	Spout Outlet Size (inch)	Part No.	Price \$
Super Ball Nozzle With Spout Outlet			
2 NPT	2 NPT	BL920	1237.00

Price Group: SD
AS02

Female Inlet Size (inch)	Swivel Adaptor Outlet Size (inch)	Part No.	Price \$
Ball Nozzle With Swivel Adaptor Outlet			
1¼ NPT	1¼	BL062	1100.00
1½ NPT	1½	BL064	1100.00

Price Group: SD

Female Inlet Size (inch)	Spout Outlet Size (inch)	Part No.	Price \$
Ball Nozzle With Spout Outlet			
1¼ NPT	1¼	BL066	1010.00
1½ NPT	1¼	BL068	1010.00
1½ NPT	1½	BL072	993.00

Female Inlet Size (inch)	Female Outlet Size (inch)	Part No.	Price \$
Ball Nozzle Without Spout Outlet			
1¼ NPT	1¼ NPT	BL066NS	i 582.70
1½ NPT	1½ NPT	BL072NS	i 582.70

Price Group: SD

Application:	For card lock and truck refuelling stations
Design:	Venturi type auto shut-off. Detachable trigger ratchet
Material:	Aluminium construction with bronze trigger
Flow Rate:	80gpm flow (requires min 7.5 gpm for auto shut-off)

Female Inlet Size (inch)	Spout Outlet Size (inch)	Part No.	Price \$
Pressure Nozzle With Spout			
1¼ NPT	1%	1144D	1002.19
1½ NPT	1%	1124D	1258.56
1¼ BSPT	1¼	1144DBSPT	1002.19
1½ BSPT	1½	1124DBSPT	1258.56

Price Group: BY
AS02

Female Inlet Size (inch)	Spout Outlet Size (inch)	Part No.	Price \$
Pressure Nozzle With Spout			
1¼ NPT	1%	AN125	i 1650.00
1½ NPT	1%	AN150	i 1480.00



Same features as table above, plus a breakaway spout. UL Listed

Price Group: SD

NOTE: Some fuel additives are not compatible with certain materials. Please contact Dixon for fuel compatibilities.

