


## Rubber Contractors Water Suction Hose (A214)

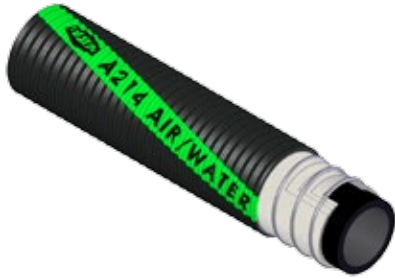

Application:	Water and slurry hose for pumping industry.
Tube:	NR/SBR
Cover:	Corrugated cover abrasion and weather resistant cover.
Temperature:	-25°C to 70°C
Reinforcement:	Synthetic cord + wire helix, high strength
Special Features:	Oil resistant, weather resistant

Part No.	Dimensions (mm)		Working Pressure		BP psi	Bend Radius (mm)	Vacuum (m.H2O)	Coil Lengths	Price \$ per mtr
	ID	OD	psi	MPa					
A214100	102	116	45	0.3	135	610	6.42	20	105.78
A214125	125	141	45	0.3	135	762	6.42	20	203.90
A214150	152	166	45	0.3	135	914	6.42	20	165.86
A214200	203	224	45	0.3	135	1218	6.42	20	281.73

Price Group: HR

DB17

## Rubber Contractors Water Suction Hose (A214) Cuffed



Part No.	Dimensions (mm)		Working Pressure		BP psi	Bend Radius (mm)	Vacuum (m.H2O)	Coil Lengths	Price \$ per mtr
	ID	OD	psi	MPa					
A214075L6 *	76	87	45	0.3	150	457	6.42	6	435.79
A214100L6	102	116	45	0.3	150	610	6.42	6	590.57
A214150L3	152	166	45	0.3	150	914	6.42	3	476.26
A214200L3	203	224	45	0.3	150	1218	6.42	3	875.20

\* Suitable for suction and open ended delivery. If a pressurised assembly is required, contact dixon.

Price Group: HR

DB17



Refer to page 70 for A214 assembly.

Complete hose data specification sheets are available upon request.

