


SISO Strainers - Side Inlet, Side Outlet

Application:	Suitable for applications where a superior corrosion resistant stainless steel is required to filter liquids. Commonly used to strain seawater for engines, generators, HVAC systems in vessels, however can be used for other liquids that require a high grade stainless steel filter to protect pumps, nozzles and injectors from large particles.
Body Material:	Electro-polished AISI 2205 cast stainless steel
Lid Material:	Electro-polished AISI 2205 cast stainless steel
Features:	<ul style="list-style-type: none"> • Offset inlet and outlet for improved performance • Free standing, base mounted • Secured by 5 wing nuts for safe, quick and easy access • No tools required • Swing down eye bolts eliminates need to remove nuts • BSP thread inlet and outlet, flanges available on request • Full height high impact resistant ABS basket • Cast anode connection point to combat galvanic corrosion • Drain plug • Lower outlet position allows for applications that require a header tank or mounting above the waterline
Options:	<ul style="list-style-type: none"> • 316 stainless steel basket • Clear polycarbonate or solid lid

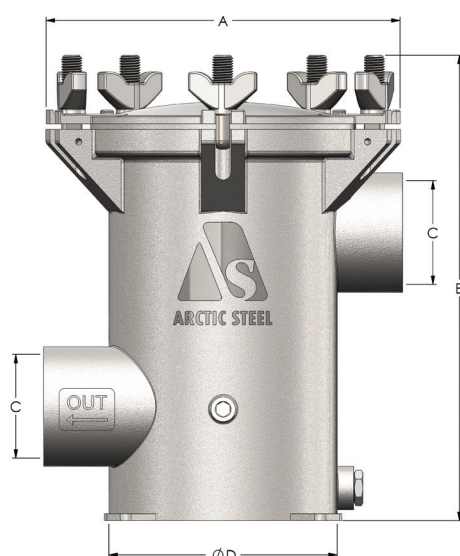

Size BSP (inch)	Part No.	Lid	Flow Rate 1 Bar L/Min	Lid Width A mm	Height B mm	Thread Size C BSP	Thread Type	Body Width D mm	Weight (kg)	Price \$ (ea)
1"	WS-SISO-100-C-A	Clear	332	150	235	1"	Female x Female	95	3.60	603.23
	WS-SISO-100-S-A	Solid	332	150	235	1"	Female x Female	95	3.75	614.53
1¼"	WS-SISO-125-C-A	Clear	535	200	269	1¼"	Female x Female	133	6.39	842.90
	WS-SISO-125-S-A	Solid	535	200	269	1¼"	Female x Female	133	6.85	860.81
1½"	WS-SISO-150-C-A	Clear	171	200	269	1½"	Female x Female	133	6.45	842.90
	WS-SISO-150-S-A	Solid	171	200	269	1½"	Female x Female	133	6.75	860.81
2"	WS-SISO-200-C-A	Clear	1,349	200	269	2"	Female x Female	133	6.40	842.90
	WS-SISO-200-S-A	Solid	1,349	200	269	2"	Female x Female	133	6.90	860.81
2½"	WS-SISO-250-C-A	Clear	1,882	235	365	2½"	Female x Female	164	13.35	1671.65
	WS-SISO-250-S-A	Solid	1,882	235	365	2½"	Female x Female	164	13.95	1694.92
3"	WS-SISO-300-C-A	Clear	2,761	235	365	3"	Female x Female	164	14.30	1671.65
	WS-SISO-300-S-A	Solid	2,761	235	365	3"	Female x Female	164	15.15	1694.92
4"	WS-SISO-400-C-A	Clear	5,366	273	478	4"	Female x Female	221	22.95	2939.89
	WS-SISO-400-S-A	Solid	5,366	273	478	4"	Female x Female	221	23.75	2998.94

Price Group: HS
AS21



1300 134 651
dixonvalve.com.au

All prices exclude GST.
ADPL718